

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE		31/07/12	M. Dong


TECHNICAL DATA

Electrical	
Impedance	50 Ω
Frequency range	0~40 GHz
VSWR	1.15:1
Contact resistance	
-centre contact	≤3mΩ
-outer contact	≤2mΩ
Insulation resistance	≥3000MΩ


Mechanical & Environmental	
Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish	
Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI

Interface Standards	
2.92mm	MIL-STD-348A

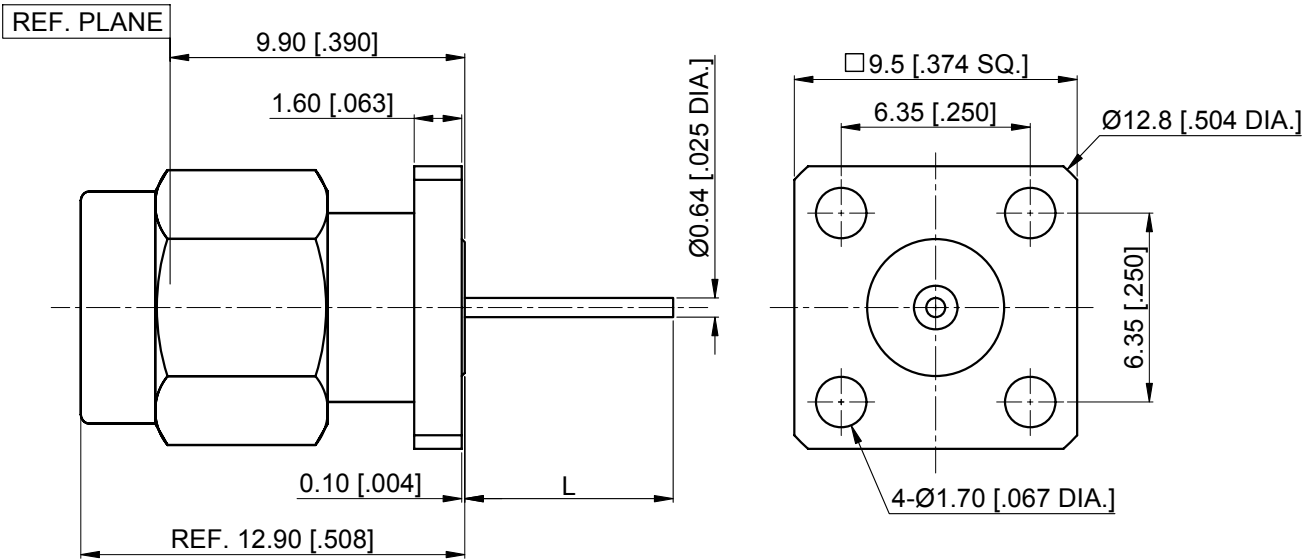

Part Number	L
C12114032A	10.92 [0.430]
C12114032B	6.84 [0.269]

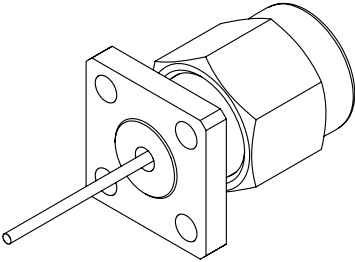

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

DRAWN:	W. Shen	31/07/12	TITLE: 2.92mm Straight Male, 4 Hole Flange, Air Line Through the Wall		 www.connov.com			
CHECKED:	K. Liu	31/07/12						
APPROVED:	M. Dong	31/07/12						
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: .XX ±0.13 [0.005"] .X ±0.20 [0.008"] X ±0.50 [0.019"] ANGULAR TOLERANCES ARE: ALL=±1°			DO NOT SCALE DRAWING	PROJECTION: 	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A

PART No.: C12114032