

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE		31/07/12	M. Dong

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~40 GHz
VSWR	1.15:1
Contact resistance	
-centre contact	≤3mΩ
-outer contact	≤2mΩ
Insulation resistance	≥3000MΩ

Mechanical & Environmental


Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish


Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI

Interface Standards


2.92mm	MIL-STD-348A
--------	--------------

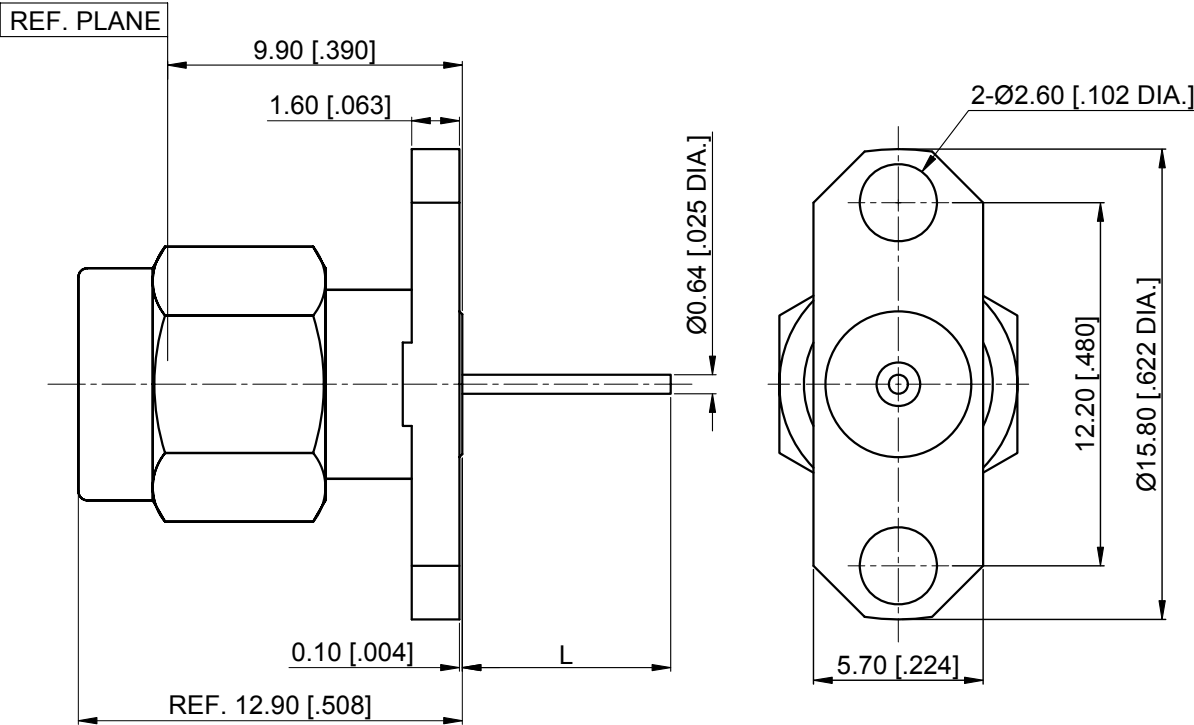

Part Number	L
C12114033A	10.92 [.430]
C12114033B	6.84 [.269]



- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

DRAWN:	W. Shen	31/07/12	TITLE: 2.92mm Straight Male, 2 Hole Flange, Air Line Through the Wall		 www.connov.com			
CHECKED:	K. Liu	31/07/12						
APPROVED:	M. Dong	31/07/12						
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES] . UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"] ANGULAR TOLERANCES ARE: ALL±1°			DO NOT SCALE DRAWING	PROJECTION: 	SIZE: A4	SCALE: 4:1	SHEET: 1/1	REV: A
					PART No.: C12114033			