

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	03/09/12	M. Dong

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~27 GHz
VSWR	1.15:1

Mechanical & Environmental



Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE

Interface Standards

SMA	MIL-STD-348A
SSMA	MIL-STD-348A

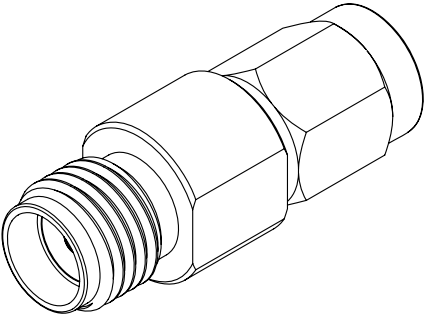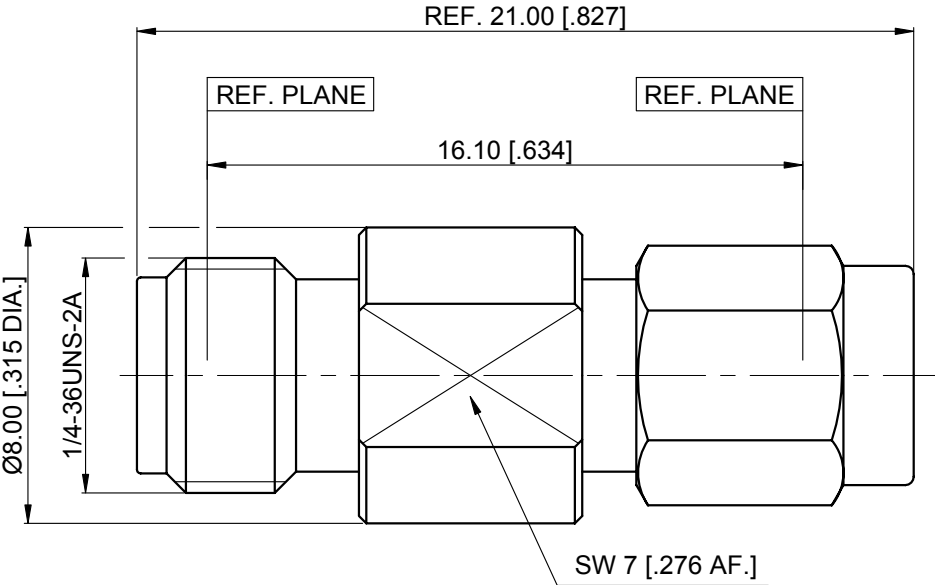

- NOTES:
- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
 - UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

DRAWN:	W. Shen	03/09/12	TITLE: Precision Adapter, SMA Female to SSMA Male		 www.connov.com			
CHECKED:	K. Liu	03/09/12						
APPROVED:	M. Dong	03/09/12						
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE: XX ±0.13 [.005"] X ±0.20 [.008"] X ±0.50 [.019"]			DO NOT SCALE DRAWING		PROJECTION: 		PART No.: C142301115	
ANGULAR TOLERANCES ARE: ALL±1°							SIZE: A4	SCALE: 5:1