

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	03/09/12	M. Dong

## TECHNICAL DATA

### Electrical

Impedance	50 Ω
Frequency range	0~18 GHz
VSWR	1.15:1
Average Power	1W

### Mechanical & Environmental



Durability (matings)	>500
Temperature range	-55 °C ~ +125 °C
RoHS Compliant	Yes

### Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated

### Interface Standards

N	MIL-STD-348A
---	--------------

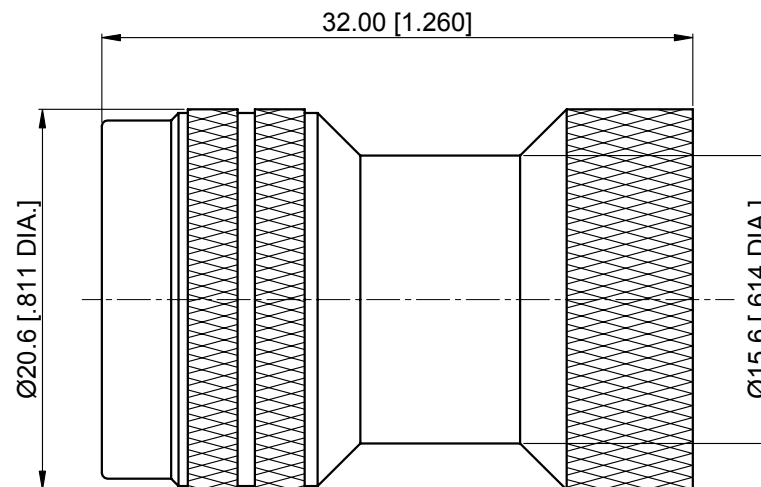

#### NOTES:

- ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
- UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

DRAWN:	W. Shen	03/09/12
CHECKED:	K. Liu	03/09/12
APPROVED:	M. Dong	03/09/12
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:		
	.XX	±0.13 [.005"]
	.X	±0.20 [.008"]
	X	±0.50 [.019"]
ANGULAR TOLERANCES ARE: ALL=±1°		

TITLE:

Precision N Male Quick  
Mate Termination, 1W,  
18GHz

DO NOT SCALE  
DRAWING

PROJECTION:

**CONNOR**<sup>®</sup>  
[www.connor.com](http://www.connor.com)

PART No.:  
**C201012**

SIZE:  
A4

SCALE:  
2.5:1

SHEET:  
1/1

REV:  
A