

... A Vital Part of Connection World

CMP[®]TER



Precision Adapter Inter Series

N TO 3.5mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~18GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-NF-3.5F-101	1.15:1	Precision Adapter, N Female to 3.5mm Female

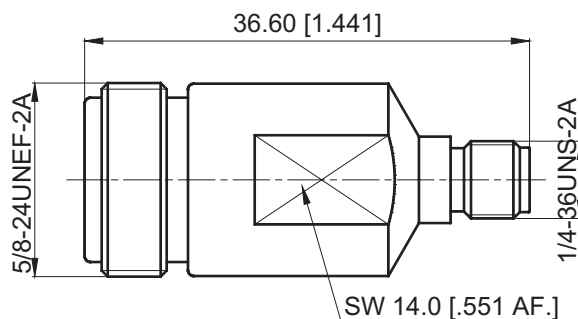


N TO 3.5mm ADAPTERS




P/N	VSWR	Description
P-NM-3.5F-102	1.15:1	Precision Adapter, N Male to 3.5mm Female

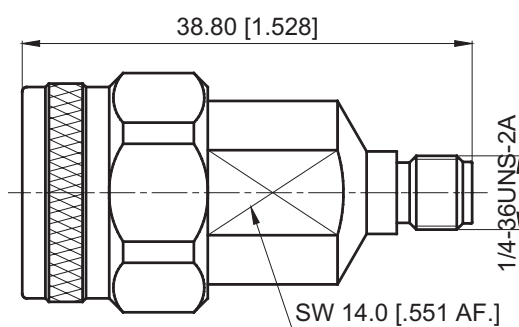

P/N	VSWR	Description
P-NF-3.5M-103	1.15:1	Precision Adapter, N Female to 3.5mm Male

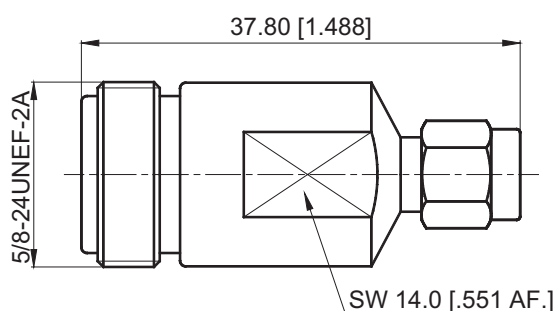

P/N	VSWR	Description
P-NM-3.5M-104	1.15:1	Precision Adapter, N Male to 3.5mm Male

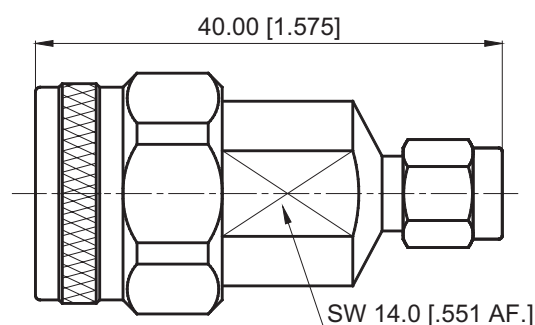

N TO 2.92mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~18GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-NF-2.92F-105	1.15:1	Precision Adapter, N Female to 2.92mm Female

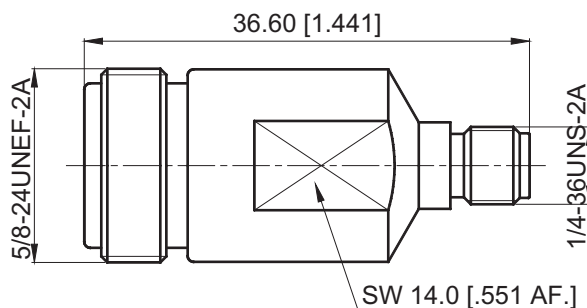


N TO 2.92mm ADAPTERS




P/N	VSWR	Description
P-NM-2.92F-106	1.15:1	Precision Adapter, N Male to 2.92mm Female

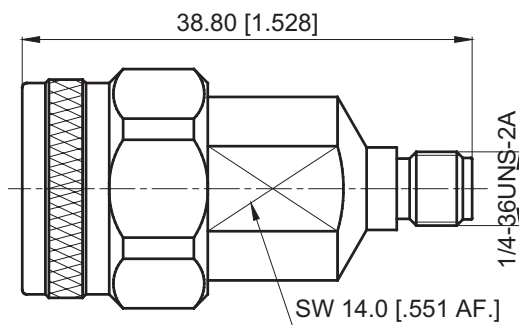

P/N	VSWR	Description
P-NF-2.92M-107	1.15:1	Precision Adapter, N Female to 2.92mm Male

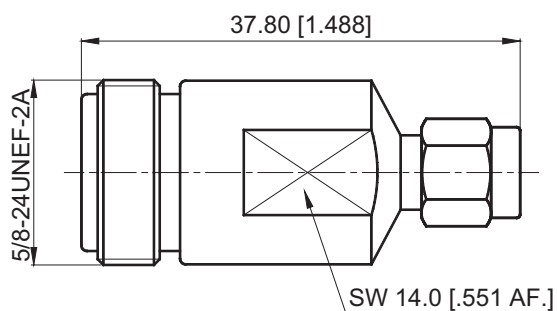

P/N	VSWR	Description
P-NM-2.92M-108	1.15:1	Precision Adapter, N Male to 2.92mm Male

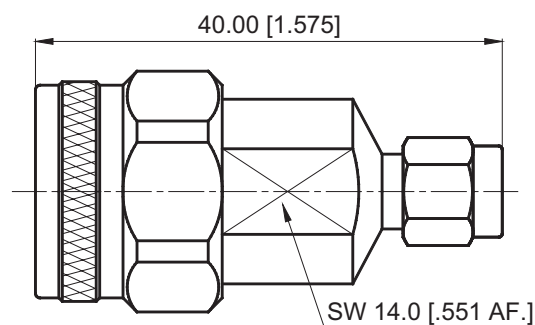

N TO 2.4mm ADAPTERS


 **RoHS**

ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~18GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-NF-2.4F-109	1.15:1	Precision Adapter, N Female to 2.4mm Female

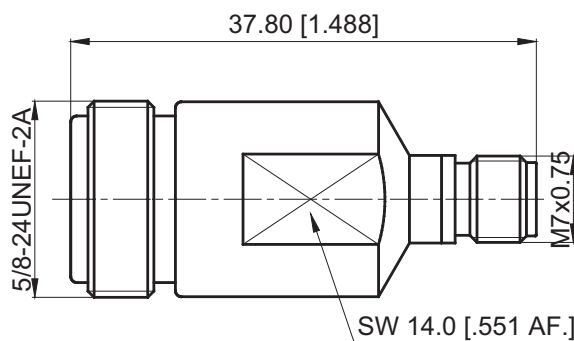


N TO 2.4mm ADAPTERS




P/N	VSWR	Description
P-NM-2.4F-110	1.15:1	Precision Adapter, N Male to 2.4mm Female

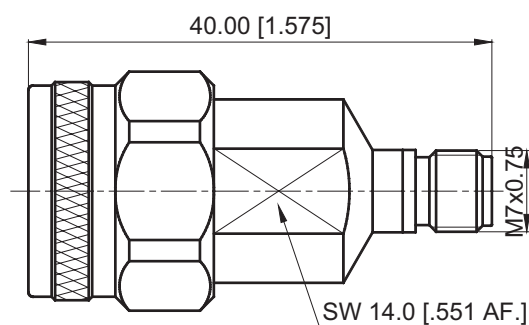

P/N	VSWR	Description
P-NF-2.4M-111	1.15:1	Precision Adapter, N Female to 2.4mm Male

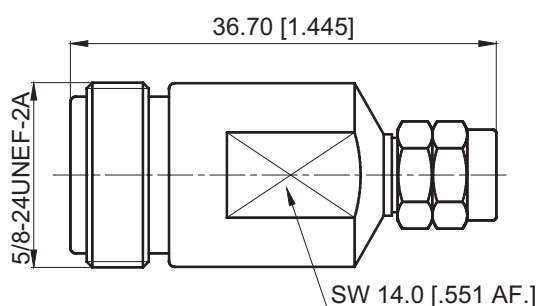

P/N	VSWR	Description
P-NM-2.4M-112	1.15:1	Precision Adapter, N Male to 2.4mm Male

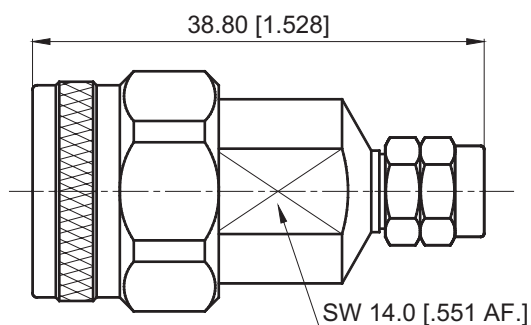

N TO TNC ADAPTERS


 **RoHS**

ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~11GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE


P/N	VSWR	Description
P-NF-TNCF-113	1.15:1	Precision Adapter, N Female to TNC Female

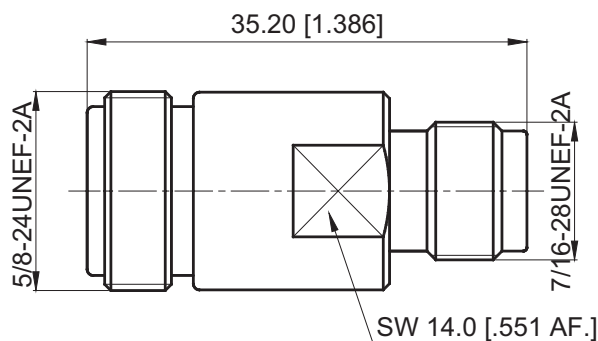


N TO TNC ADAPTERS




P/N	VSWR	Description
P-NM-TNCF-114	1.15:1	Precision Adapter, N Male to TNC Female

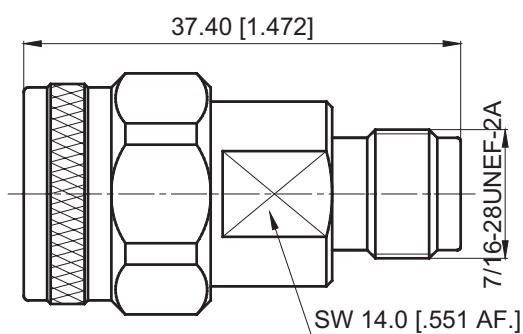

P/N	VSWR	Description
P-NF-TNCM-115	1.15:1	Precision Adapter, N Female to TNC Male

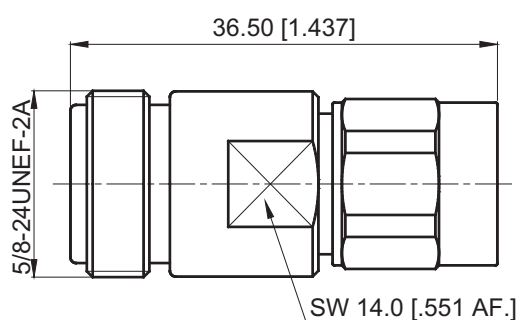

P/N	VSWR	Description
P-NM-TNCM-116	1.15:1	Precision Adapter, N Male to TNC Male

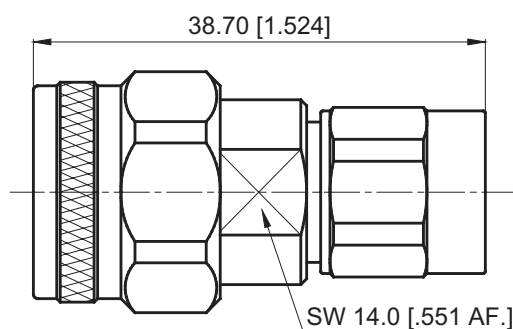

N TO TNCA ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~18GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE


P/N	VSWR	Description
P-NF-TNCAF-117	1.15:1	Precision Adapter, N Female to TNCA Female

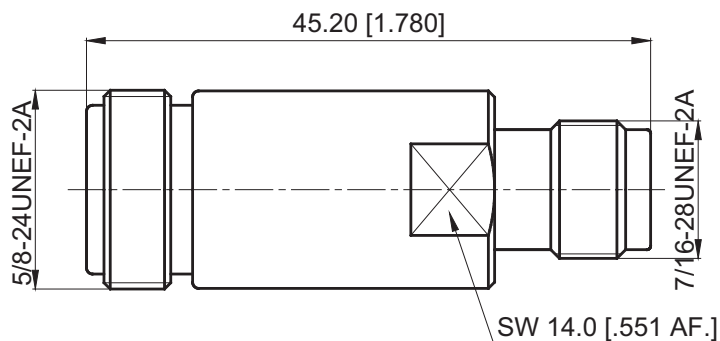


N TO TNCA ADAPTERS

 **RoHS**


P/N	VSWR	Description
P-NM-TNCAF-118	1.15:1	Precision Adapter, N Male to TNCA Female

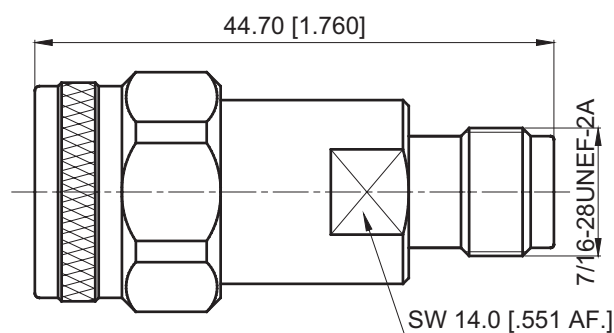

P/N	VSWR	Description
P-NF-TNCAM-119	1.15:1	Precision Adapter, N Female to TNCA Male

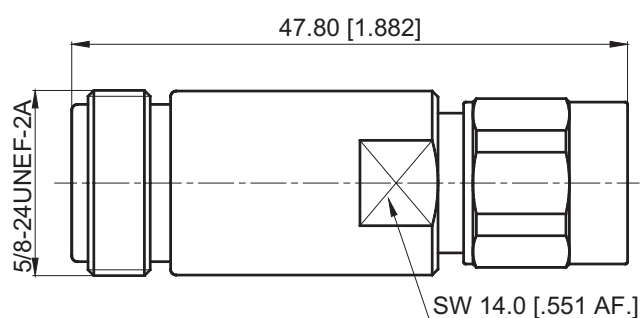

P/N	VSWR	Description
P-NM-TNCAM-120	1.15:1	Precision Adapter, N Male to TNCA Male

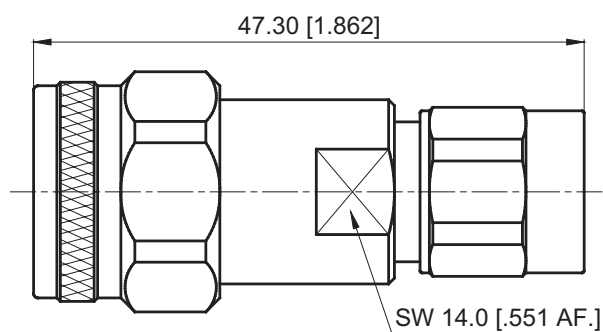

N TO SMA ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~18GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE


P/N	VSWR	Description
P-NF-SMAF-121	1.15:1	Precision Adapter, N Female to SMA Female

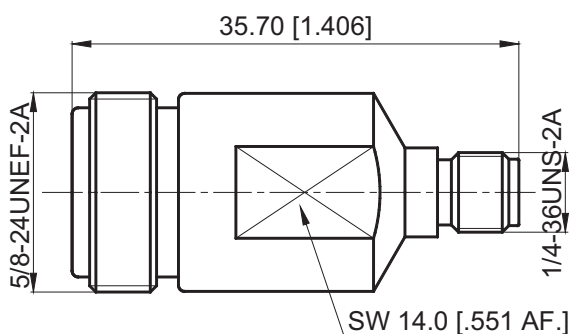


N TO SMA ADAPTERS




P/N	VSWR	Description
P-NM-SMAF-122	1.15:1	Precision Adapter, N Male to SMA Female

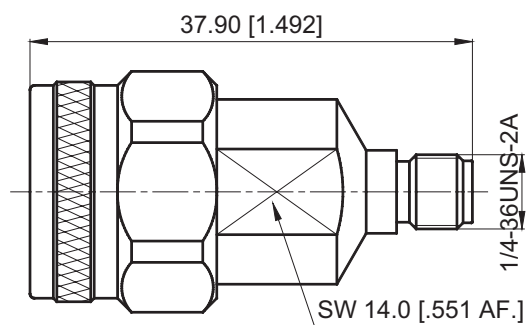

P/N	VSWR	Description
P-NF-SMAM-123	1.15:1	Precision Adapter, N Female to SMA Male

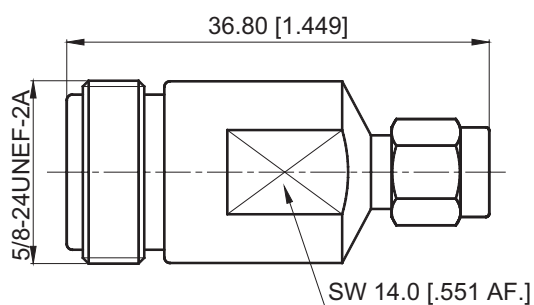


P/N	VSWR	Description
P-NM-SMAM-124	1.15:1	Precision Adapter, N Male to SMA Male

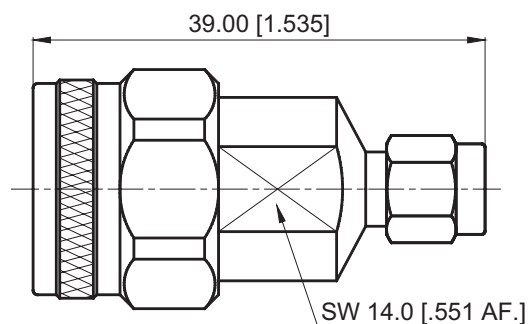


N TO SMA ADAPTERS

 **RoHS**


P/N	VSWR	Description
P-NF-SMAF-125	1.15:1	Precision Adapter, N Female to SMA Female, 4 Hole Flange

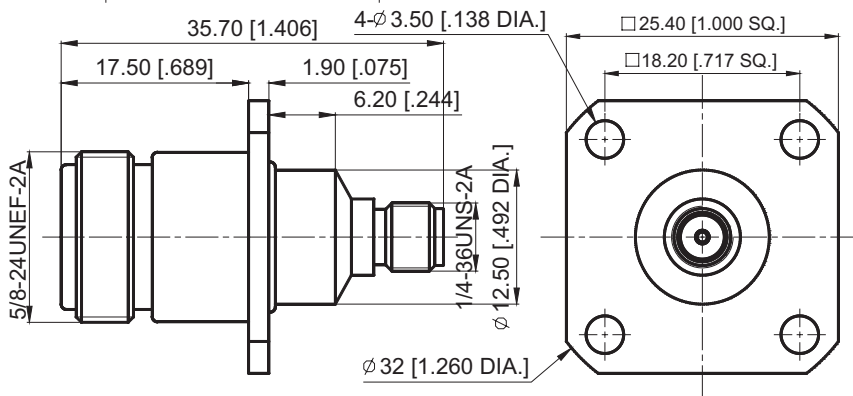

P/N	VSWR	Description
P-NF-SMAF-126	1.15:1	Precision Adapter, N Female to SMA Bulkhead Female

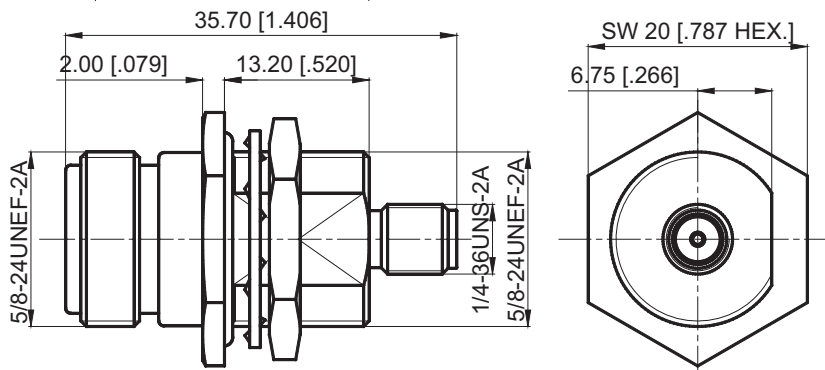

P/N	VSWR	Description
P-NF-SMAF-127	1.15:1	Precision Adapter, N Bulkhead Female to SMA Female

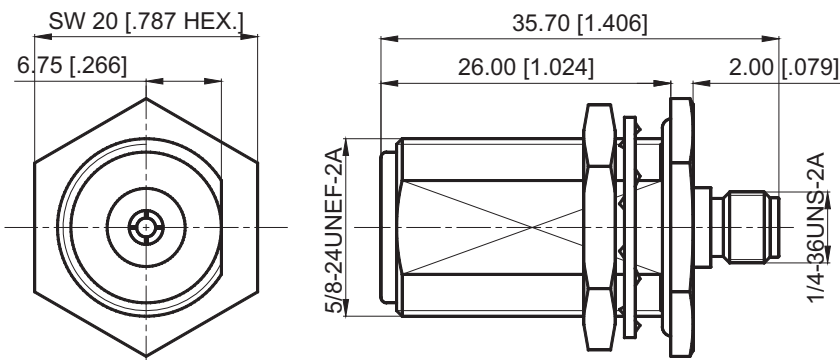

APC-7 TO N ADAPTERS


 **RoHS**

ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~18GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-APC7-NF-128	1.10:1	Precision Adapter, APC-7 to N Female

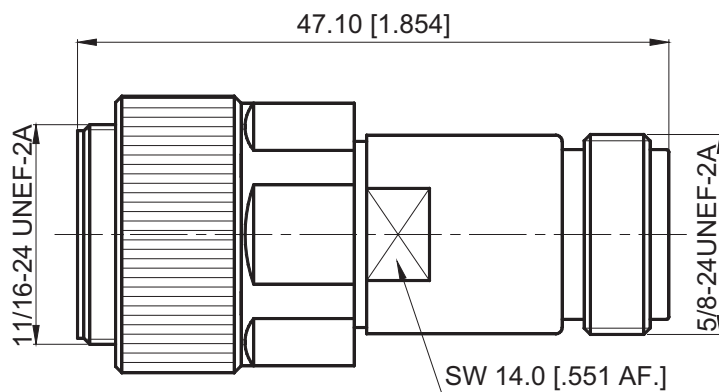

APC-7 TO N ADAPTERS



P/N	VSWR	Description
P-APC7-NM-129	1.10:1	Precision Adapter, APC-7 to N Male

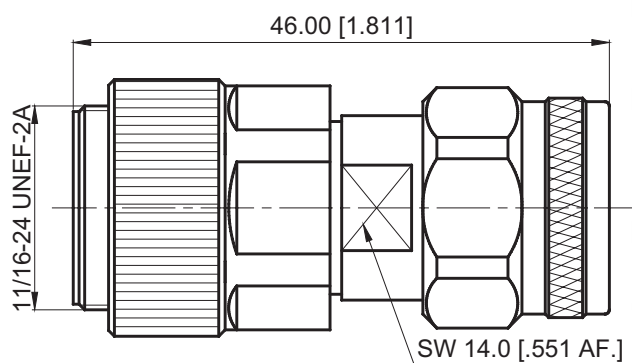

APC-7 TO 3.5mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~18GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-APC7-3.5F-211	1.10:1	Precision Adapter, APC-7 to 3.5mm Female

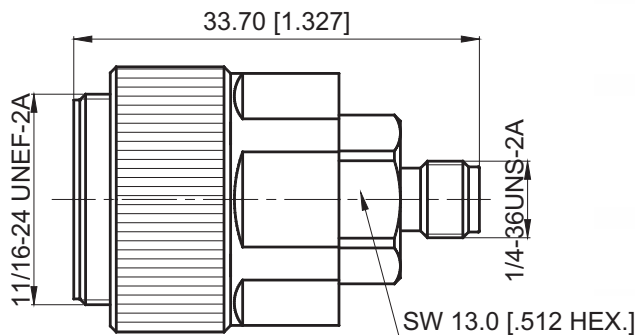

APC-7 TO 3.5mm ADAPTERS

 **RoHS**

P/N	VSWR	Description
P-APC7-3.5M-212	1.10:1	Precision Adapter, APC-7 to 3.5mm Male

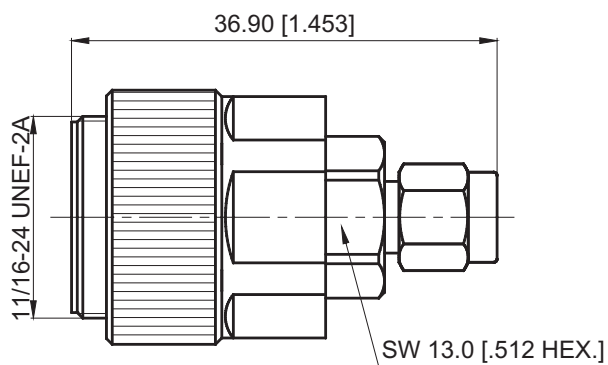

3.5mm TO 2.92mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~33GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-3.5F-2.92F-130	1.15:1	Precision Adapter, 3.5mm Female to 2.92mm Female

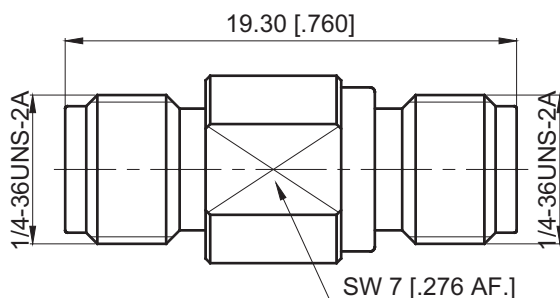


3.5mm TO 2.92mm ADAPTERS

 **RoHS**


P/N	VSWR	Description
P-3.5F-2.92F-131	1.15:1	Precision Adapter, 3.5mm Female to 2.92mm Female, 4 Hole Flange

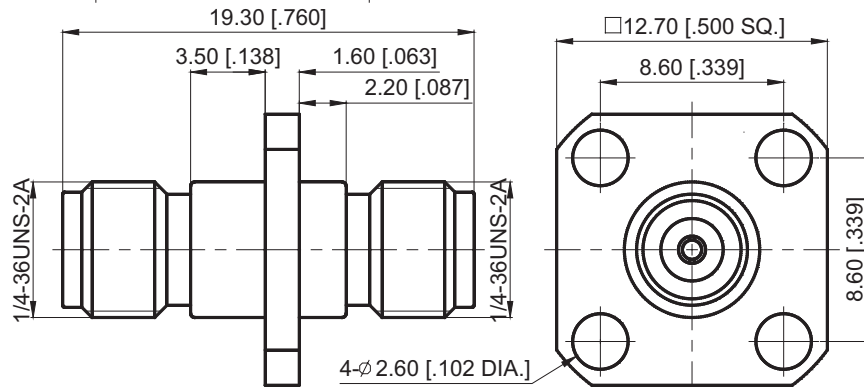

P/N	VSWR	Description
P-3.5M-2.92F-132	1.15:1	Precision Adapter, 3.5mm Male 2.92mm Female

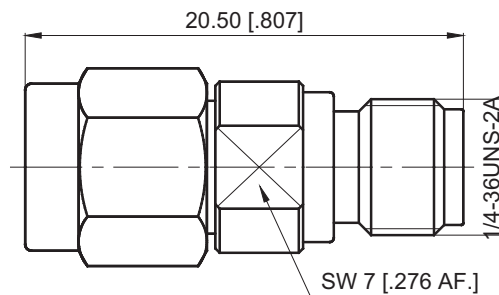


P/N	VSWR	Description
P-3.5F-2.92M-133	1.15:1	Precision Adapter, 3.5mm Female to 2.92mm Male

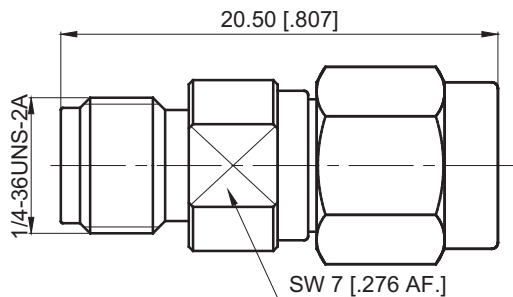

3.5mm TO 2.92mm ADAPTERS

 **RoHS**

P/N	VSWR	Description
P-3.5M-2.92M-134	1.15:1	Precision Adapter, 3.5mm Male to 2.92mm Male

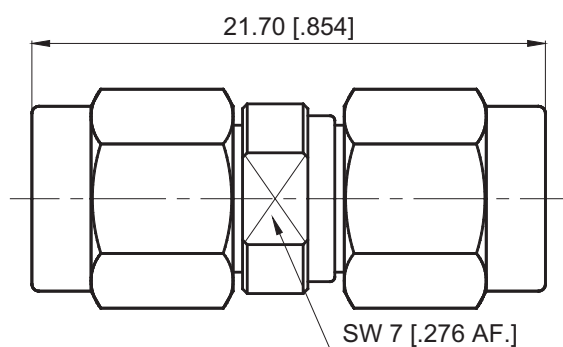

3.5mm TO 2.4mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~33GHz

MECHANICAL DATA	
Temperature range	-55°C~+165°C
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-3.5F-2.4F-135	1.15:1	Precision Adapter, 3.5mm Female to 2.4mm Female

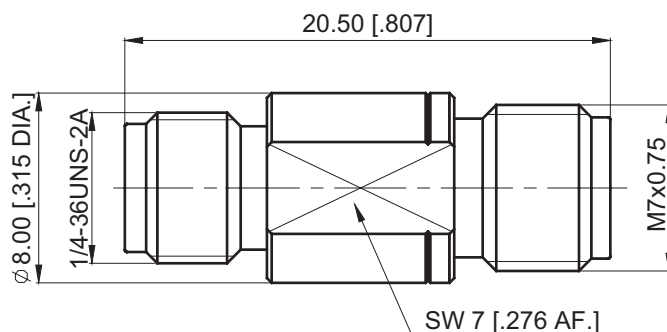


3.5mm TO 2.4mm ADAPTERS




P/N	VSWR	Description
P-3.5M-2.4F-136	1.15:1	Precision Adapter, 3.5mm Male to 2.4mm Female

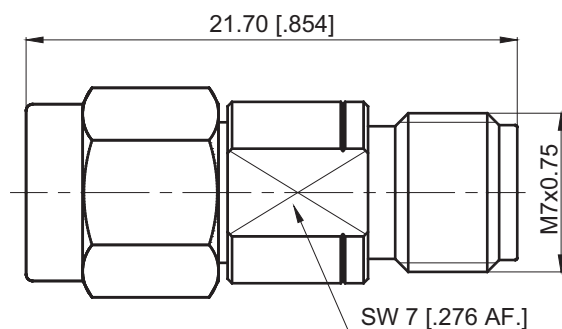

P/N	VSWR	Description
P-3.5F-2.4M-137	1.15:1	Precision Adapter, 3.5mm Female to 2.4mm Male

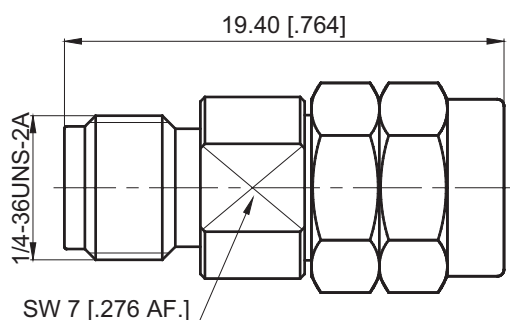

P/N	VSWR	Description
P-3.5M-2.4M-138	1.15:1	Precision Adapter, 3.5mm Male to 2.4mm Male

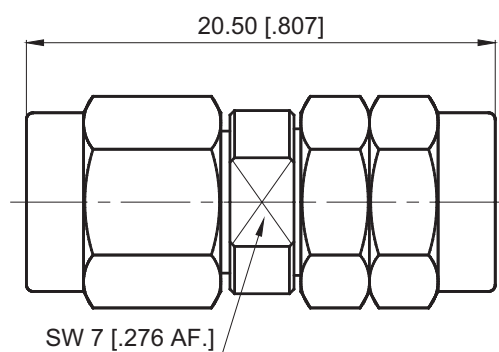

3.5mm TO 1.85mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~33GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-3.5F-1.85F-139	1.15:1	Precision Adapter, 3.5mm Female to 1.85mm Female

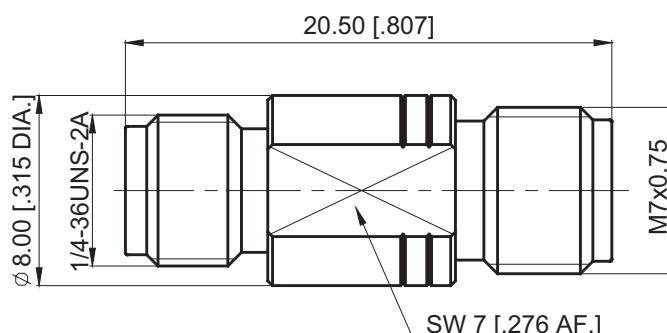


3.5mm TO 1.85mm ADAPTERS




P/N	VSWR	Description
P-3.5M-1.85F-140	1.15:1	Precision Adapter, 3.5mm Male to 1.85mm Female

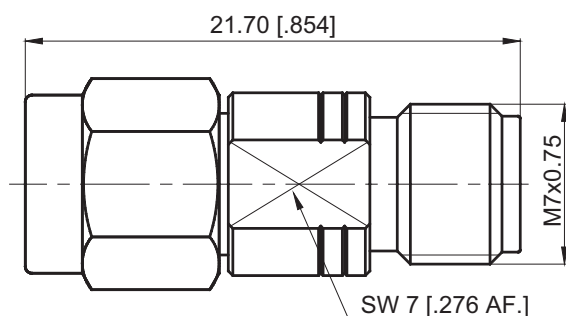

P/N	VSWR	Description
P-3.5F-1.85M-141	1.15:1	Precision Adapter, 3.5mm Female to 1.85mm Male

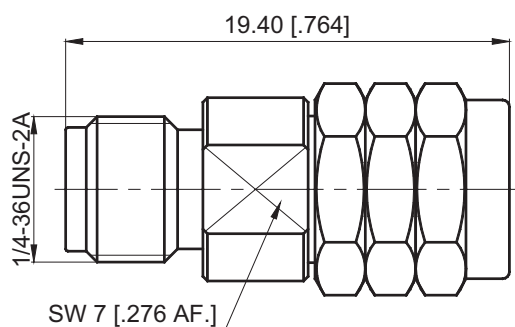

P/N	VSWR	Description
P-3.5M-1.85M-142	1.15:1	Precision Adapter, 3.5mm Male to 1.85mm Male

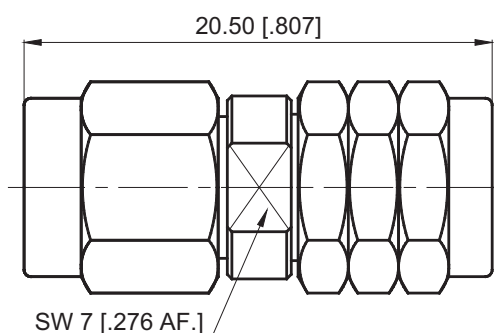

SMA TO 3.5mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~27GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE


P/N	VSWR	Description
P-SMAF-3.5F-143	1.15:1	Precision Adapter, SMA Female to 3.5mm Female

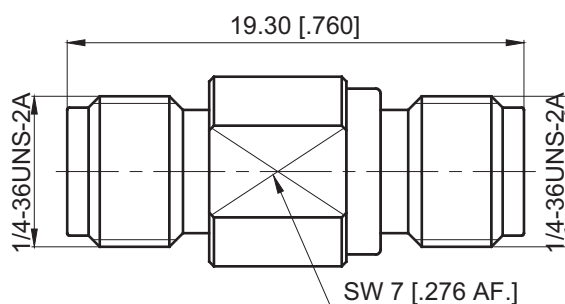


SMA TO 3.5mm ADAPTERS




P/N	VSWR	Description
P-SMAM-3.5F-144	1.15:1	Precision Adapter, SMA Male to 3.5mm Female

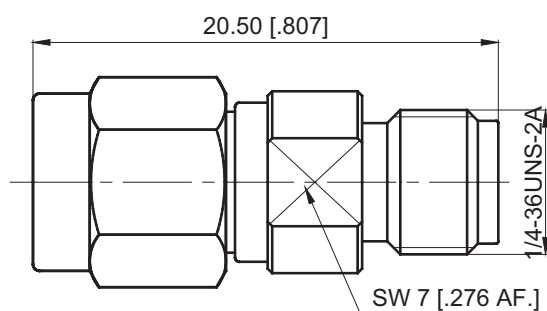

P/N	VSWR	Description
P-SMAF-3.5M-145	1.15:1	Precision Adapter, SMA Female to 3.5mm Male

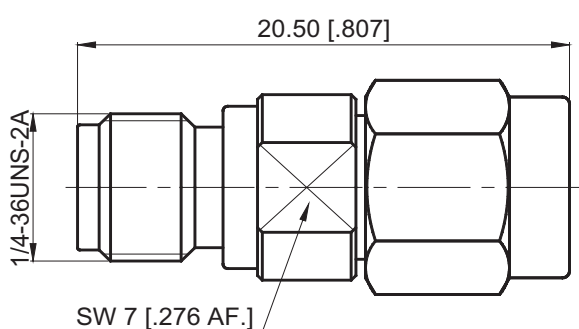

P/N	VSWR	Description
P-SMAM-3.5M-146	1.15:1	Precision Adapter, SMA Male to 3.5mm Male

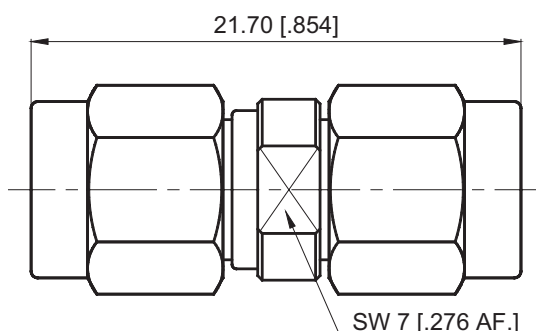

2.92mm TO 2.4mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~40GHz

MECHANICAL DATA	
Temperature range	-55°C~+165°C
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-2.92F-2.4F-147	1.20:1	Precision Adapter, 2.92mm Female to 2.4mm Female

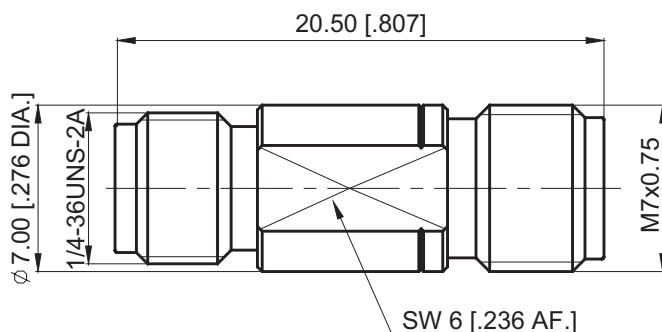


2.92mm TO 2.4mm ADAPTERS




P/N	VSWR	Description
P-2.92M-2.4F-148	1.15:1	Precision Adapter, 2.92mm Male to 2.4mm Female

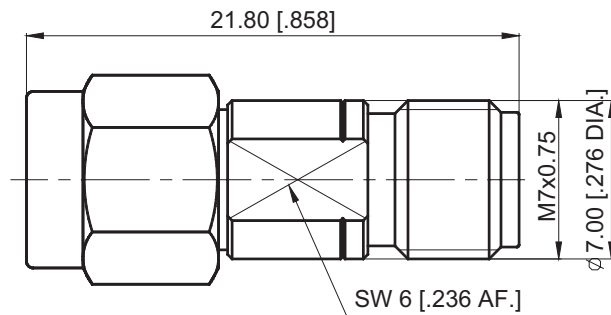

P/N	VSWR	Description
P-2.92F-2.4M-149	1.15:1	Precision Adapter, 2.92mm Female to 2.4mm Male

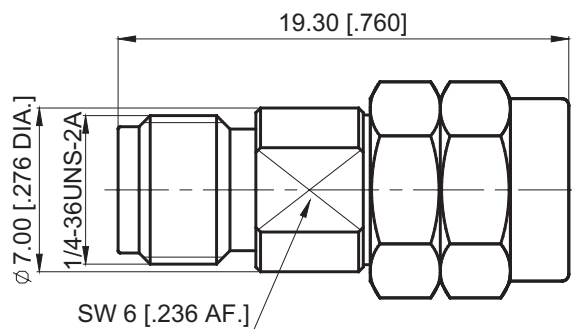


P/N	VSWR	Description
P-2.92M-2.4M-150	1.15:1	Precision Adapter, 2.92mm Male to 2.4mm Male

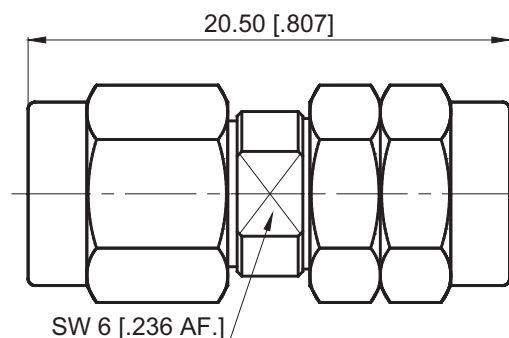

2.92mm TO 2.4mm ADAPTERS



P/N	VSWR	Description
P-2.92F-2.4F-151	1.20:1	Precision Adapter, 2.92mm Female to 2.4mm Female, 4 Hole Flange

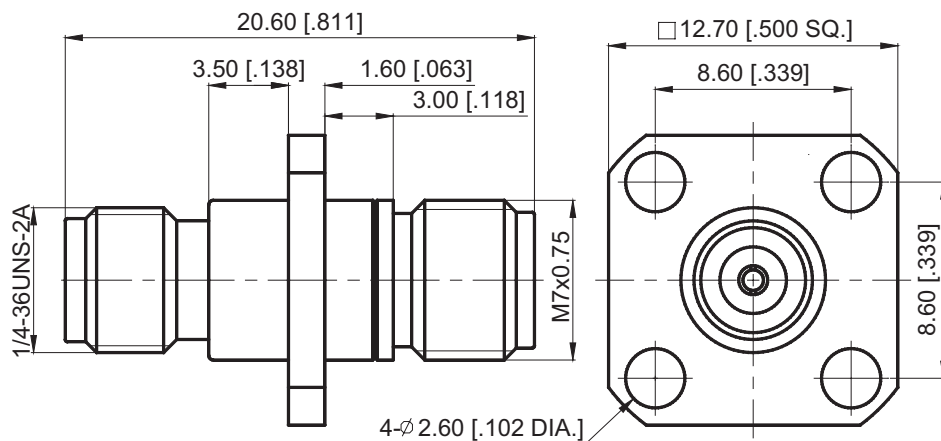

2.92mm TO 1.85mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~40GHz

MECHANICAL DATA	
Temperature range	-55°C~+165°C
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-2.92F-1.85F-152	1.20:1	Precision Adapter, 2.92mm Female to 1.85mm Female

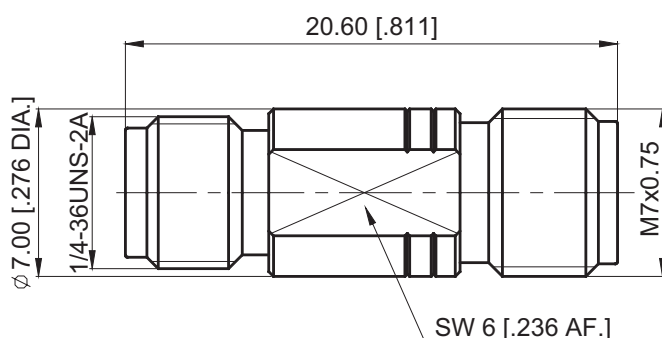


2.92mm TO 1.85mm ADAPTERS




P/N	VSWR	Description
P-2.92M-1.85F-153	1.15:1	Precision Adapter, 2.92mm Male to 1.85mm Female

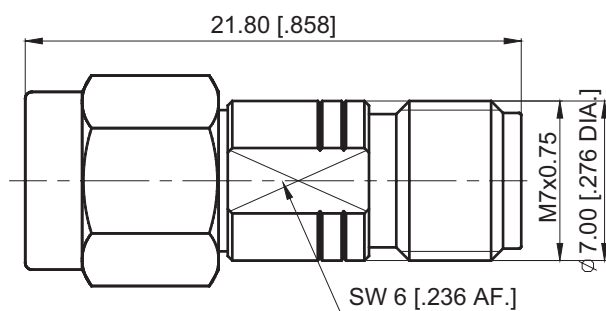

P/N	VSWR	Description
P-2.92F-1.85M-154	1.15:1	Precision Adapter, 2.92mm Female to 1.85mm Male

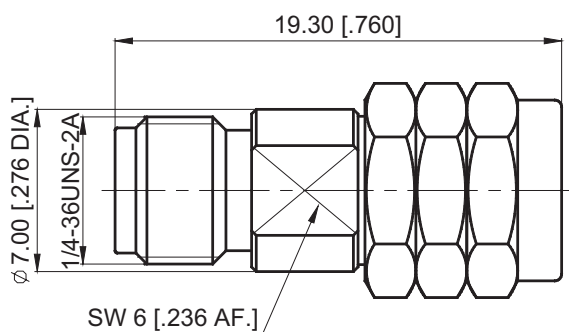

P/N	VSWR	Description
P-2.92M-1.85M-155	1.15:1	Precision Adapter, 2.92mm Male to 1.85mm Male

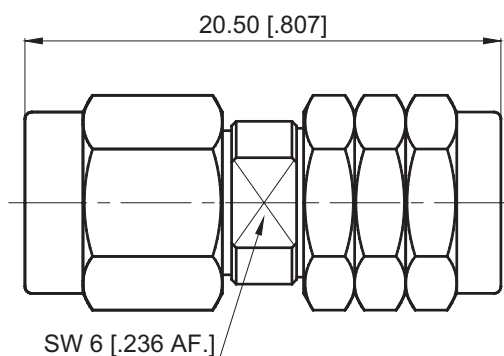

SMA TO 2.92mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~27GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE


P/N	VSWR	Description
P-SMAF-2.92F-156	1.15:1	Precision Adapter, SMA Female to 2.92mm Female

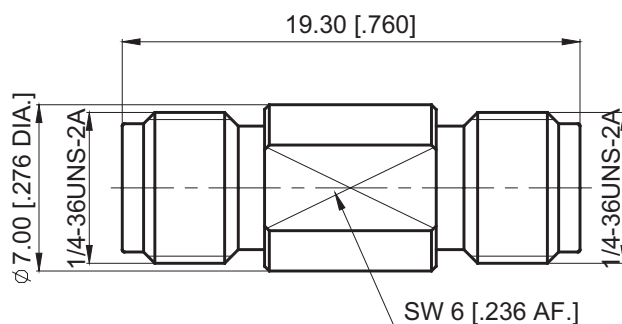


SMA TO 2.92mm ADAPTERS

 **RoHS**


P/N	VSWR	Description
P-SMAM-2.92F-157	1.15:1	Precision Adapter, SMA Male to 2.92mm Female

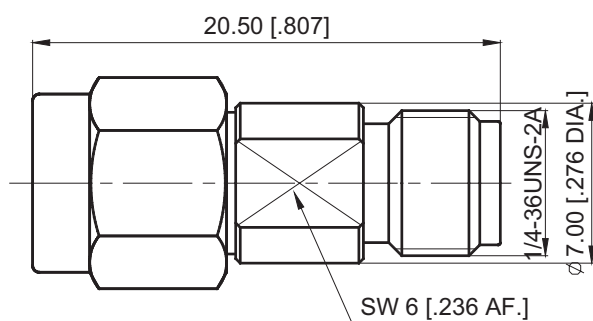

P/N	VSWR	Description
P-SMAF-2.92M-158	1.15:1	Precision Adapter, SMA Female to 2.92mm Male

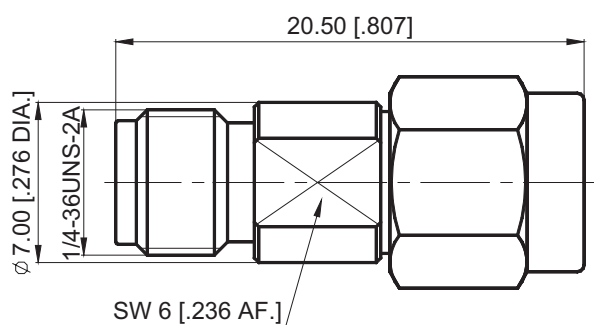

P/N	VSWR	Description
P-SMAM-2.92M-159	1.15:1	Precision Adapter, SMA Male to 2.92mm Male

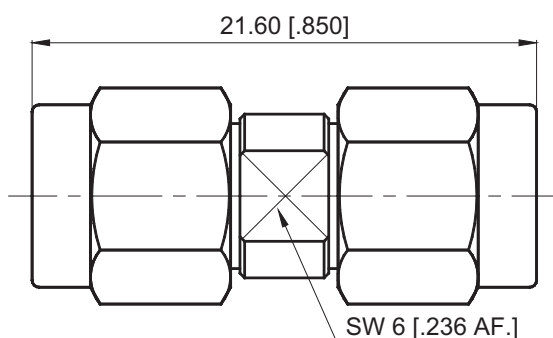

2.4mm TO 1.85mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~50GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI


P/N	VSWR	Description
P-2.4F-1.85F-160	1.25:1	Precision Adapter, 2.4mm Female to 1.85mm Female

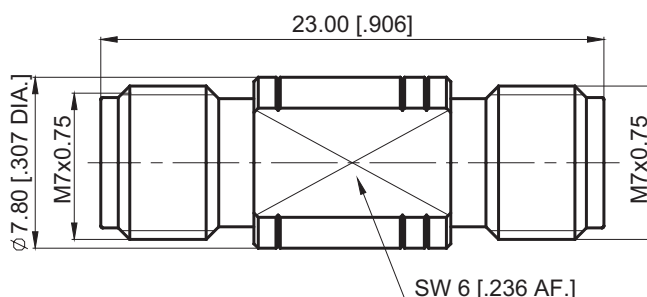


2.4mm TO 1.85mm ADAPTERS

 **RoHS**


P/N	VSWR	Description
P-2.4M-1.85F-161	1.25:1	Precision Adapter, 2.4mm Male to 1.85mm Female

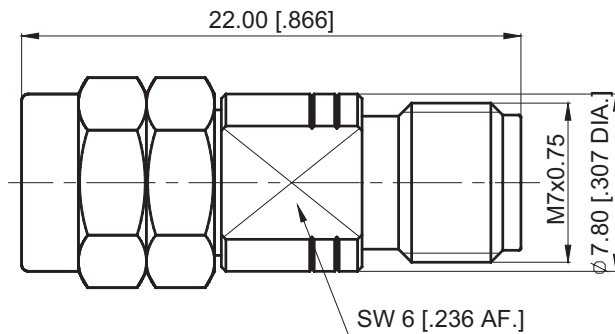

P/N	VSWR	Description
P-2.4F-1.85M-162	1.25:1	Precision Adapter, 2.4mm Female to 1.85mm Male

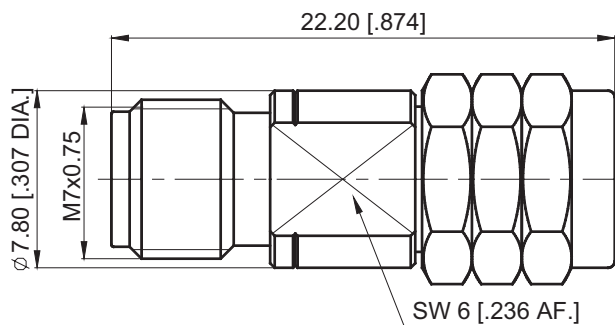

P/N	VSWR	Description
P-2.4M-1.85M-163	1.25:1	Precision Adapter, 2.4mm Male to 1.85mm Male

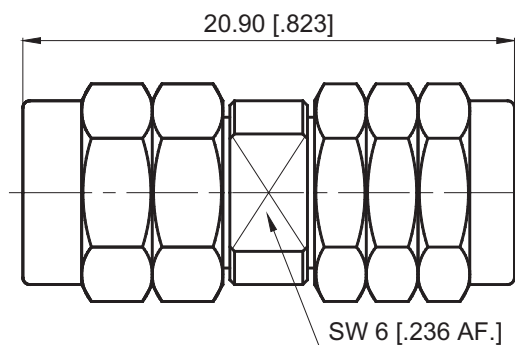

SMA TO 2.4mm ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~27GHz

MECHANICAL DATA	
Temperature range	-55°C~+165°C
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE


P/N	VSWR	Description
P-SMAF-2.4F-164	1.15:1	Precision Adapter, SMA Female to 2.4mm Female

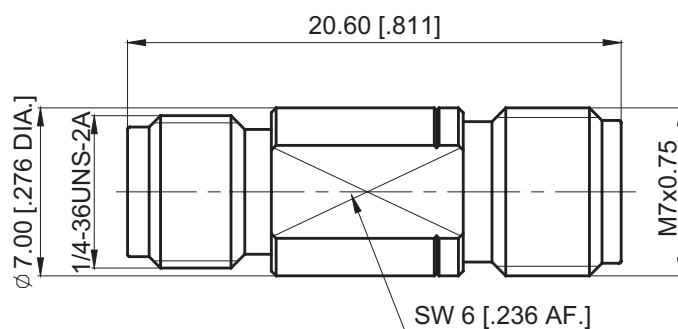


SMA TO 2.4mm ADAPTERS

 **RoHS**


P/N	VSWR	Description
P-SMAM-2.4F-165	1.15:1	Precision Adapter, SMA Male to 2.4mm Female

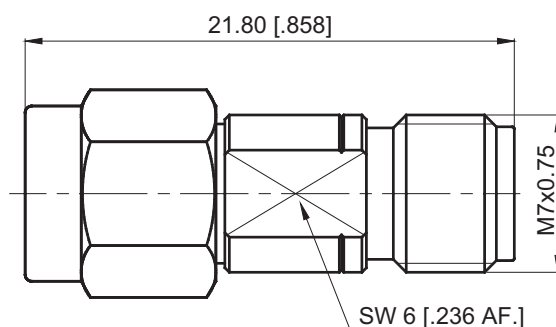

P/N	VSWR	Description
P-SMAF-2.4M-166	1.15:1	Precision Adapter, SMA Female to 2.4mm Male

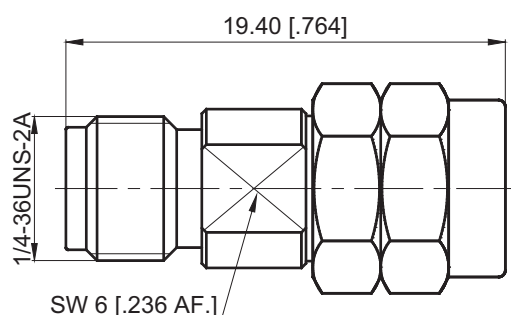

P/N	VSWR	Description
P-SMAM-2.4M-167	1.15:1	Precision Adapter, SMA Male to 2.4mm Male

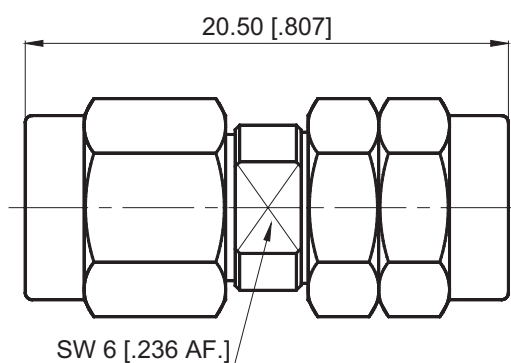

TNC TO SMA ADAPTERS




ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~11GHz

MECHANICAL DATA	
Temperature range	-55°C~+165°C
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE


P/N	VSWR	Description
P-TNCF-SMAF-168	1.15:1	Precision Adapter, TNC Female to SMA Female

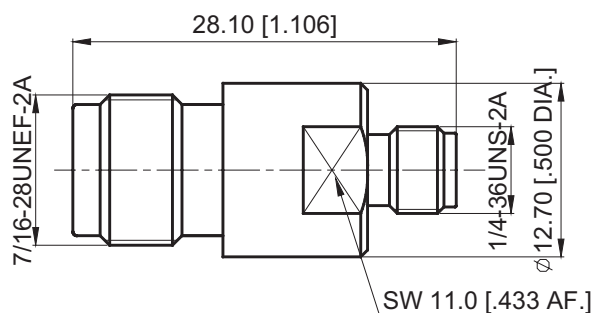


TNC TO SMA ADAPTERS




P/N	VSWR	Description
P-TNCM-SMAF-169	1.15:1	Precision Adapter, TNC Male to SMA Female

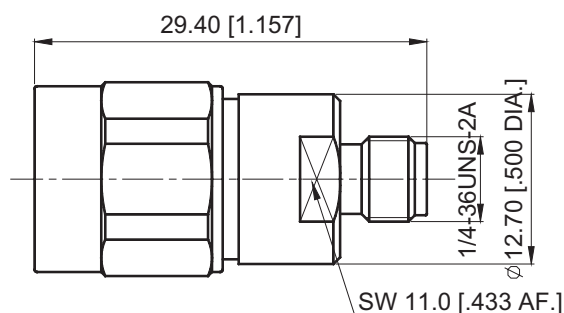

P/N	VSWR	Description
P-TNCF-SMAM-170	1.15:1	Precision Adapter, TNC Female to SMA Male

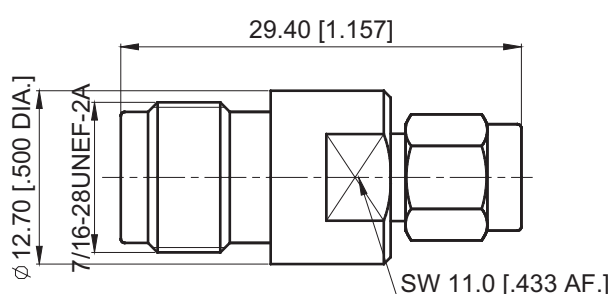

P/N	VSWR	Description
P-TNCM-SMAM-171	1.15:1	Precision Adapter, TNC Male to SMA Male

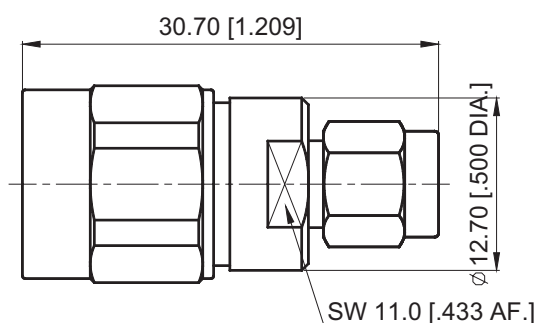

TNCA TO SMA ADAPTERS


 **RoHS**

ELECTRICAL DATA	
Impedance	50 Ohm
Frequency range	DC~18GHz

MECHANICAL DATA	
Temperature range	-55℃~+165℃
Durability (matings)	>500

MATERIAL DATA	
Body	Stainless Steel (SU303), Passivated
Center Contact	Beryllium Copper Alloy,Gold-plated
Insulator	PEI, PTFE


P/N	VSWR	Description
P-TNCAF-SMAF-172	1.15:1	Precision Adapter, TNCA Female to SMA Female

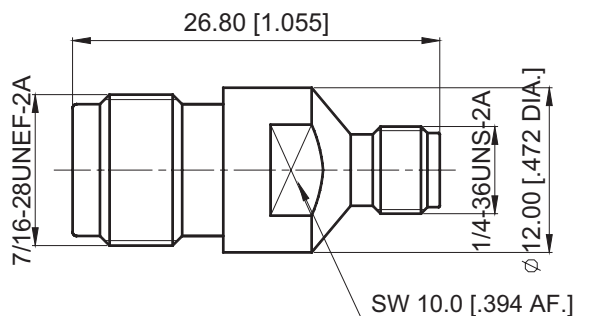


TNCA TO SMA ADAPTERS

 **RoHS**


P/N	VSWR	Description
P-TNCAM-SMAF-173	1.15:1	Precision Adapter, TNCA Male to SMA Female

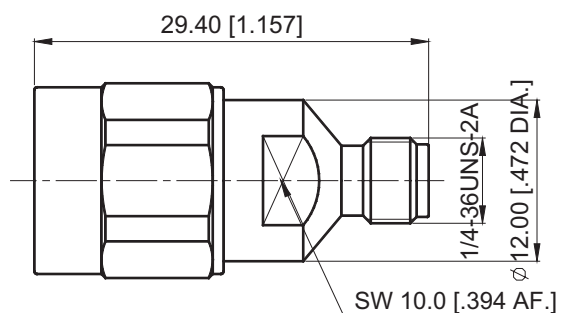

P/N	VSWR	Description
P-TNCAF-SMAM-174	1.15:1	Precision Adapter, TNCA Female to SMA Male

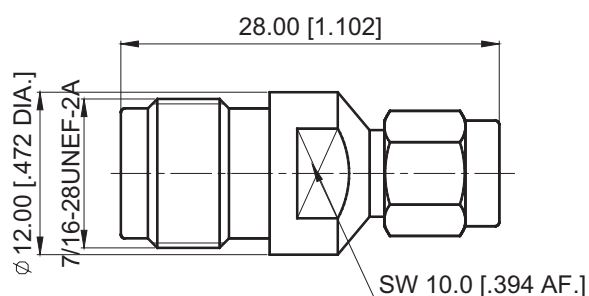

P/N	VSWR	Description
P-TNCAM-SMAM-175	1.15:1	Precision Adapter, TNCA Male to SMA Male

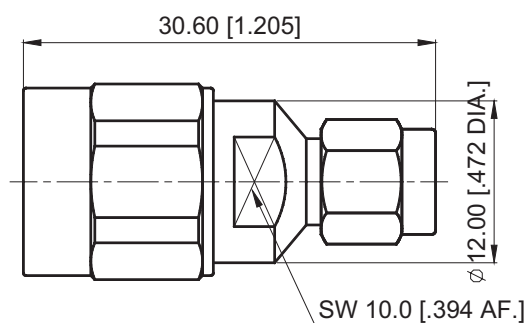

Cmpter Electronics Co., Limited.

Office Adress: #45 ZhongShan East Road,
ZhenJiang, JiangSu China.
Tel:+86 511 8443 6131
Fax:+86 511 8502 5485
Email: sales@cmpter.com
Website: <http://www.cmpter.com>