

REVISIONS				
REV	DESCRIPTION OF REVISION	ECN No.	DATE	APPROVED
A	INITIAL RELEASE	—	09/08/12	M. Dong

TECHNICAL DATA

Electrical

Impedance	50 Ω
Frequency range	0~18 GHz
VSWR	1.15:1
Contact resistance	
-centre contact	≤1.5mΩ
-outer contact	≤0.2mΩ
Insulation resistance	≥5000MΩ

Mechanical & Environmental



Durability (matings)	>500
Temperature range	-55 °C ~ +165 °C
RoHS Compliant	Yes

Material & Finish

Body	Stainless Steel (SU303), Passivated
Pin Contact	Beryllium Copper Alloy, Gold-plated
Insulator	PEI & PTFE

Interface Standards

TNCA	MIL-STD-348A
------	--------------

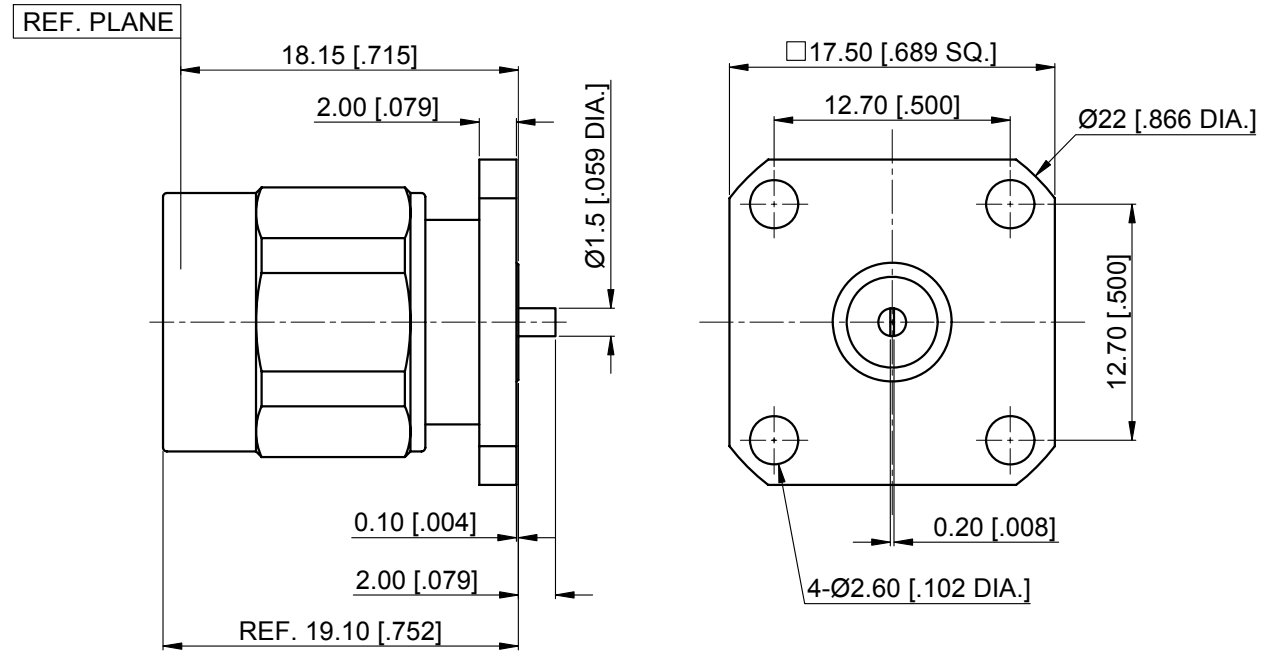

NOTES:

1. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME
2. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.

DRAWN:	W. Shen	09/08/12
CHECKED:	K. Liu	09/08/12
APPROVED:	M. Dong	09/08/12
UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS [INCHES]. UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCES ARE:		
.XX	±0.13 [005"]	
.X	±0.20 [008"]	
X	±0.50 [019"]	
ANGULAR TOLERANCES ARE: ALL=±1°		

TITLE:

TNCA Straight Male,
4 Hole Flange,
With Tab

DO NOT SCALE
DRAWING

PROJECTION:

CONNORV[®]
www.connorv.com

PART No.:
C41114006

SIZE:
A4

SCALE:
2.5:1

SHEET:
1/1

REV:
A